

The topical subject

One-off oil for furniture, doors, floors ...

AURO
my world ... naturally


AURO One-off oil No. 109 AURO One-off oil, natural No. 109-90

Protection and beauty for your wood

One-off oils are suitable for all customary kinds of wood and indoor applications. Normally, just a single application will be sufficient to give raw wood an easy-care, attractive finish. Application on previously oiled surfaces increases the protective effect and highlights the natural wood colour. Fluctuations in moisture are controlled and the resistance properties are improved. The delicate white pigmentation of One-off oil, natural enhances the colour of the wood and is ideal for wood of a lighter shade (maple, ash and birch).

Application couldn't be easier!

AURO One-off oil is applied with a brush, roller or a non-fluffing cloth on the surface that is to be treated. Areas where the oil is rapidly soaked up should be re-saturated wet-on-wet up to three times, depending on the given requirements. After a venting time of approx. 20 minutes, all surplus oil should be rubbed into the wood, and finally removed with a polishing pad or cloth. In the event of considerable surplus oil then this can be removed with oil-resistant wipers or spatulas made of metal or plastic and collected for renewed use.

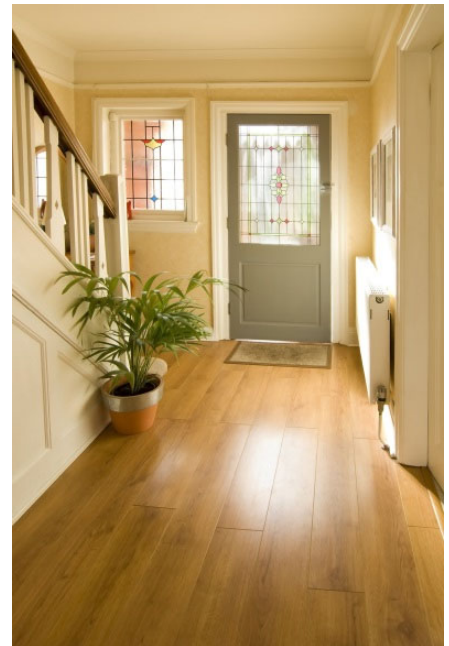

Treatment after application

Rubbing-in or removal of all surplus oil will result in an evenly satin mat surface.

Limited load is possible after 24 hours.
The final firmness after approx. 2-4 weeks.

The drying process is initiated by oxygen uptake. This results in product-specific odours and emissions. It is therefore absolutely necessary to provide for sufficient and tempered ventilation during the entire drying time.

Clean dry (not wet) in the first weeks after application.

Care and cleaning

Wood surfaces treated with AURO One-off oil should be re-oiled when necessary, i.e. depending on the degree of wear and tear. For this purpose clean the surfaces with a mild cleaning agent, e.g. **AURO Paint and stain cleaner (435)**. This is then followed by after-care with One-off oil applied with a nonfluffing cloth or a polishing pad for floors. To offset wear symptoms as soon as possible we recommend care with **AURO Care oil (106)**. If the surface is waxed, then **AURO Care wax (107)** should be applied so that the surface becomes once again resistant to dirt and water (see green box).

Tool – handling and cleaning

Products that contain drying oil can ignite spontaneously, particularly if cloths are crumpled. Consequently, all used cloths must be individually spread out, smoothed and allowed to dry. Dried cloths can be disposed of with the domestic waste or, if required, stored for reuse. Clean brushes with **AURO Diluent (191)** and then wash them with **AURO Plant soap (411)** and rinse in water. Rub **AURO Plant soap (411)** into brushes and surface coaters and store the tools in this manner. Before they are used again wash the tools in water.

Product storage and safety

As is the case with all paints and coating materials, the original container of One-off oil must be kept tightly closed and stored in a cool, but frost-free place well out of reach of children. When stored in this manner the guaranteed storage stability is 24 months. Normally the products can be used beyond this period, but always conduct a test application beforehand. When applying oils - as is customary with paints and varnishes - ensure that the appropriate protection measures are always observed, especially fresh-air ventilation and skin protection.

Care of oiled and waxed surfaces

Treatment with natural oils and waxes gives wood surfaces brilliance and highlights the specific grain and structure of the wood. Moreover, the surfaces are given dirt and water repelling properties which is combined with an anti-static effect. Contrary to varnished surfaces, bases treated in this manner retain their respiratory properties, thereby contributing to the regulation of the room climate. Depending on the stresses to which the oiled/waxed surfaces are exposed, the immediate contact area is subject to mechanical wear. Sooner or later this becomes particularly apparent on floors, work surfaces and tables. Apart from the deterioration of appearance, surface wear becomes increasingly susceptible to liquids and dirt deposits. **AURO Care oil (106)** and **Care wax (107)** counteract these wear symptoms. Your AURO dealer will be happy to advise you in this respect. Please also refer to our information on Care oil and Care wax!



For video fans

On our YouTube™ channel „AURO TV“, we present application videos for the proper treatment of floors, e.g. with **AURO PurSolid Hard oil (123)**. The application steps shown here apply to the AURO One-off oils as well. Please see

www.youtube.en/aurotv



AURO Pflanzenchemie AG

Alte Frankfurter Str. 211 · 38122 Braunschweig
Tel.: +49 531- 281 41 0 | Fax: +49 531- 281 41 61
export@auro.de | www.auro.com

